


WRXCL10 Precision Cleaver

Stable Cleaving Operation

Introducing the WRXCL10 high precision cleaver with removable bin offering high precision fiber cleaving for 250µm, 900µm, 2mm, 3mm, and ribbon cable up to 12 fibers. Work efficiency is maximized with simple two step operation and automatic blade reset. Universal adapter plate is included for all types of single fiber and will also accommodate industry standard removable fiber holders up to 12 fibers. Sixteen blade positions provide up to 48,000 fiber cleaves with simple blade adjustment and replacement.

Features

- High precision cleaver with removable bin
- Stable operation with typical cleave angle 90 degrees +/- 0.5 degrees.
- Cleaves single and ribbon cable
- Includes adapter plate for cleaving 250µm, 900µm, 2mm, and 3mm cable
- High precision cleaving blade with sixteen blade positions for 48,000 cleaves
- Small and Lightweight
- Anvil opens high for clear visibility
- Automatic blade reset for work efficiency
- Easy blade rotation and adjustment
- Compatible with industry standard fiber holders

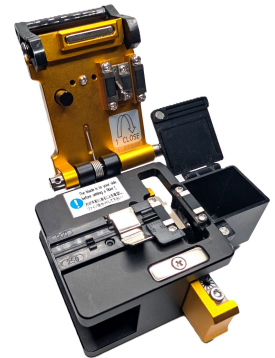

Specifications

Parameter	Value
Applicable Fiber	250µm, 900µm, 2mm, 3mm, ribbon cable up to 12 fibers
Fiber Cleave Length	9mm - 16mm
Fiber Cleave Angle	90 degrees +/- 0.5 degrees
Holder	Universal fiber adapter plate
Weight/Dimensions	350g / 63mm x 76mm x 63mm

Ordering Information

Part Number	Description
WRXCL10	Precision cleaver with bin and fiber adapter plate