


LED Tracker Patch Cords



Identifies Patch Cords easily for moves, adds, and changes

LED Tracker Patch Cords make it easy to locate and identify patch cords between server racks in telecommunications closets and data centers. These patch cords increase work efficiency and avoid disruption of connections. Each LED Tracker Patch Cord shines bright at both ends to be identified easily without any interruption of service. The separate LED power supply with built-in and changeable battery affixes onto the patch cord keeping it illuminated. Tracker patch cords are available as a 3.0 mm OD duplex LC uniboot style in various lengths in single mode and multimode fiber. The LED Tracker Patch Cords are specified to IEC 61754-20.

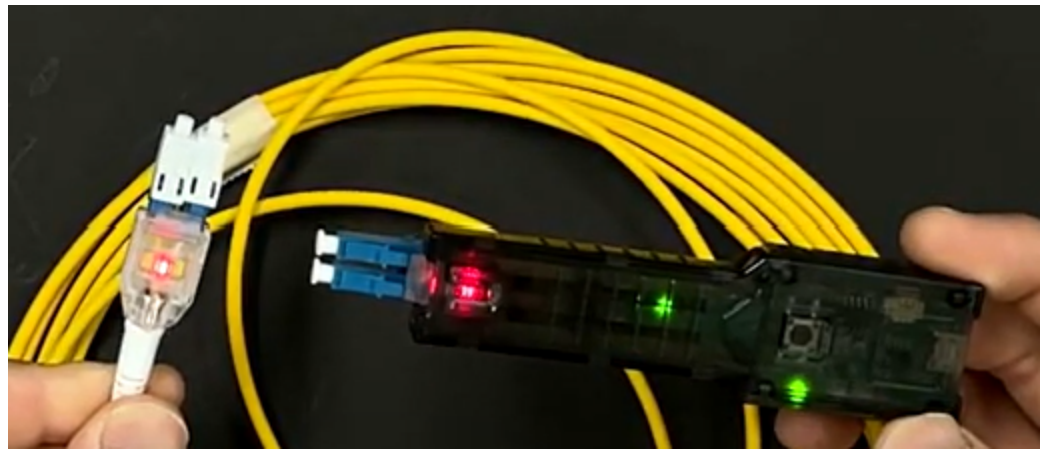



Features

- Identifies patch cords easily and without hassle
- Increases work efficiency and avoids disruption of connections
- LED power supply device with built-in and changeable battery is affixed to one end of the patch cord and keeps it illuminated so you easily find the other end.
- Patch Cords available as 3.0 mm diameter duplex LC uniboot style in various lengths with single mode or multi mode fiber.
- 100% factory tested and performance certified to IEC 61754-20

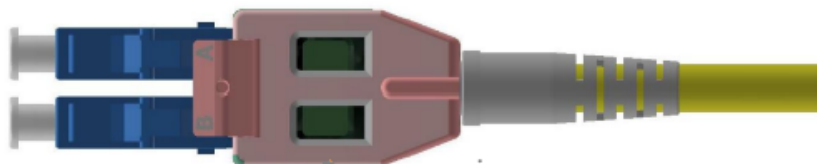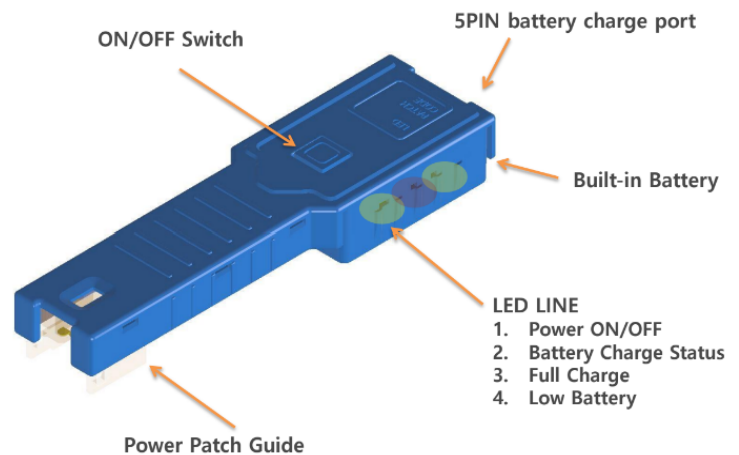

Specifications

Parameter	Value
Connector Type	Duplex LC Uniboot Style (single mode and multimode)
Cable Type	900um Fiber (2), Power (2)
Cable Diameter	3.0 mm
Insertion Loss	≤0.2 db
Return Loss	UPC ≥ 50dB; APC ≥ 60dB
Durability	≤0.03 db/db
Operating Temperature	-40°C to +75°C
Specification	IEC 61754-20

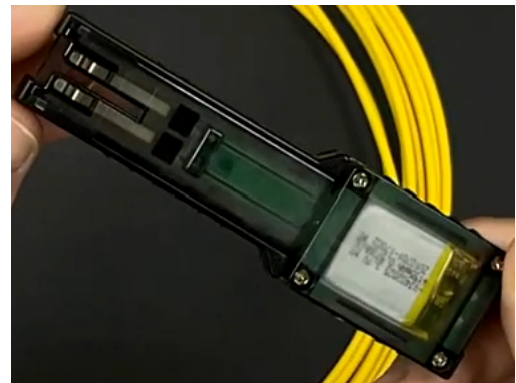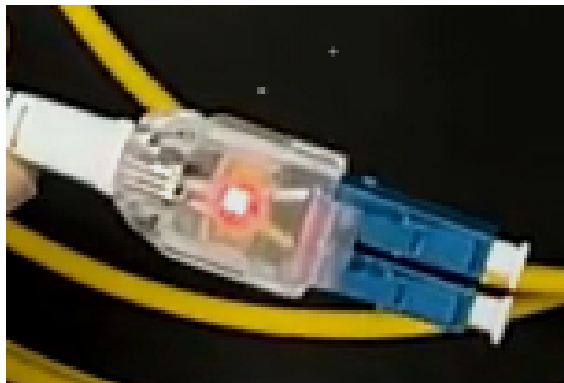

Ordering Information (X = length in meters)

Part Number	Description
PS-LED	Power supply with built-in and changeable battery
DJ-LCU-SM-3.0-X	LC SM/UPC 3.0 mm OD Duplex patch cord with uniboot
DJ-LCA-SM-3.0-X	LC SM/APC 3.0 mm OD Duplex patch cord with uniboot
DJ-LCU-OM4-3.0-X	LC MM/OM4 3.0 mm OD Duplex patch cord with uniboot
DJ-LCU-OM3-3.0-X	LC MM/OM3 3.0 mm OD Duplex patch cord with uniboot
DJ-LCU-OM1-3.0-X	LC MM/OM1 3.0 mm OD Duplex patch cord with uniboot